

GENERAL

LOCATED IN LAST RACK POSITION ON RIGHT, ACTS AS SIGNAL COLLECTOR AND ANNUNCIATOR CARD FOR SS814 RANGE OF FIRE CARD AND GAS CARDS.

SPECIFICATION

INDICATORS

ALARM - FIRE OR GAS ALARM RED LED
 FAULT - SYSTEM FAULT YELLOW LED
 POWER - CIRCUIT HEALTHY GREEN LED

POWER CONSUMPTION (AT 24VDC)

QUESCENT : 20mA
 ALARM : 100mA

RELAY OUTPUTS

FAULT - SPCO RATED 500mA/24VDC

ELECTRONIC OUTPUTS


ALARM A, ALARM B : OPEN COLLECTOR
 DARLINGTON OUTPUTS
 RATING PER OUTPUT : 500mA/24VDC
 LOGIC 1 : 0.6V

MECHANICAL

FRONT PANEL : 3U HIGH 4HP WIDE (20mm)
 CARD DEPTH : 160mm
 WEIGHT : 120grms

CONNECTOR

64 WAY DIN 41612 (A+C)
 3 MICRON GOLD PLATING

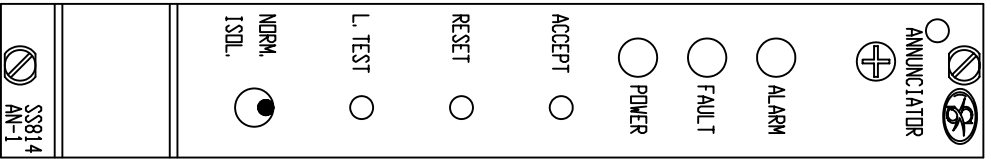

POWER SUPPLY

18-35 VOLTS DC

HUMIDITY

95% R.H. NON-CONDENSING

TEMPERATURE RANGE

0-50 DEG C

HEAD OFFICE :

SEAGULL SAFETY LTD

45 CHESTNUT AVENUE
 WOKINGHAM, BERKSHIRE
 RG41 3HW, ENGLAND UNITED KINGDOM
 Tel: 44-118-978 3978 Fax: 44-118-977 5261

REGIONAL OFFICE :

SEAGULL SAFETY (S) PTE LTD

#07-06 PERFECT INDUSTRIAL BUILDING
 1 GENTING LINK
 SINGAPORE 349518
 Tel: (65) 6-747 9646 Fax: (65) 6-744 4028



THIS IS THE PROPERTY OF SEAGULL SAFETY LTD AND IS ONLY ISSUED ON CONDITION THAT NO COPY IS TAKEN OR REPRODUCTION OR DISCLOSURE TO A THIRD PARTY EITHER WHOLLY OR IN PART IS MADE WITHOUT THE WRITTEN CONSENT OF SEAGULL SAFETY LTD.

TITLE :

ANNUNCIATOR CARD
SS814 AN-1

REV.	DATE	DESCRIPTION	DRAWN	CHECK'D
0	07/07/92	ISSUED FOR APPROVAL	SA	AD
1	24/07/98	REVISED DETAIL TRK & DATA	SA	AD

DRAWN BY :		DATE :	
SA	AD	07/07/1992	
CHECKED BY :		DATE :	
AD	AD	07/07/1992	
DRAWING NO. :		REVISION	
SS66100-07		1	